


Cylinder Connections

VUC Series

Product Features

- Cylinder Connections
- Connect to a cylinder valve
- 1/4NPT male /6mm tube fitting /6mm OD tube connection
- All connections are degrease to oxygen service
- All connection are supplied with sealing washer
- 15 µin. Ra max, 10µin Ra average surface finish

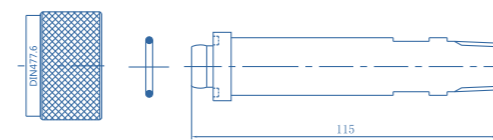

Hand tight nut & nipple
(Example: VCC-C-HNN-DIN477.6)

Ordering Information

VUC - S - N - CGA580 - TF6M

Material

S: 316L

Parts

- N: Nut
- NN: Nut & Nipple
- HN: Hand tight nut
- HNN: Hand tight nut & Nipple
- G: Gasket

Inlet Connection

- None: 1/4"NPT(M)
- TF6M: 6mm Tube fitting
- BW6M: 6mm Tube weld
- BW1/4: 1/4" Tube weld

Cylinder Connection

Detailed description of the cylinder connection including the relevant standard and number of the connection

