



三通接头

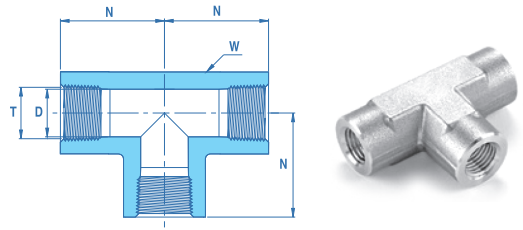


订购参数	T NPT内螺纹	N		D 最小开口		W 扳手平面
	inch	inch	mm	inch	mm	inch
SS-VAT-F2	1/8	1.04	26.4	0.31	8.6	1/2
SS-VAT-F4	1/4	1.17	29.7	0.41	11.4	11/16
SS-VAT-F6	3/8	1.42	36.1	0.56	15	13/16
SS-VAT-F8	1/2	1.56	39.6	0.69	18.5	1
SS-VAT-F12	3/4	1.92	48.8	0.90	23.9	1-1/4
SS-VAT-F16	1	1.91	48.5	1.13	29.7	1-11/16

外螺纹三通接头

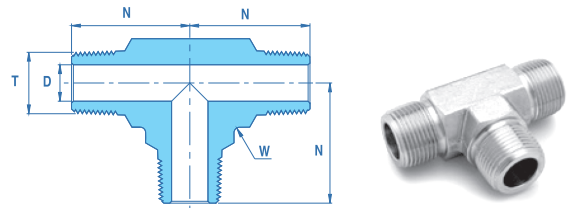

订购参数	T NPT外螺纹	N		D 最小开口		W 扳手平面
	inch	inch	mm	inch	mm	inch
SS-VAT-M2	1/8	0.88	22.4	0.19	4.8	7/16
SS-VAT-M4	1/4	1.05	26.7	0.28	7.1	1/2
SS-VAT-M6	3/8	1.17	29.7	0.38	9.6	11/16
SS-VAT-M8	1/2	1.45	36.8	0.47	11.9	13/16

内外螺纹三通接头

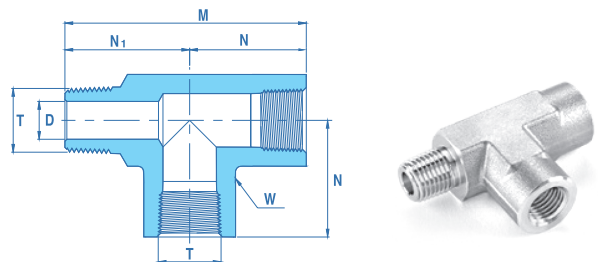



订购参数	T NPT外螺纹/内螺纹	M		N		N1		D 最小开口		W 扳手平面
	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch
SS-VAT-F2-M2-TF2	1/8	1.91	48.5	1.04	26.4	0.87	22.1	0.19	4.8	1/2
SS-VAT-F4-M4-TF4	1/4	2.34	59.4	1.17	29.7	1.17	29.7	0.28	7.1	11/16
SS-VAT-F6-M6-TF6	3/8	2.68	68.1	1.42	36.1	1.26	32.0	0.38	9.6	13/16
SS-VAT-F8-M8-TF8	1/2	3.12	79.2	1.56	39.6	1.56	39.6	0.47	11.9	1



尺寸仅供参考，如有变更恕不另行通知。




支管三通接头



订购参数	T NPT外螺纹/内螺纹	M		N		N1		D		W 扳手平面
	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch
SS-VAT-F2-TM2	1/8	2.08	52.8	1.04	26.4	0.87	22.1	0.19	4.8	1/2
SS-VAT-F4-TM4	1/4	2.34	59.4	1.17	29.7	1.17	29.7	0.28	7.1	11/16
SS-VAT-F6-TM6	3/8	2.84	72.1	1.42	36.1	1.26	32.0	0.38	9.6	13/16
SS-VAT-F8-TM8	1/2	3.12	79.2	1.56	39.6	1.56	39.6	0.47	11.9	1

内螺纹四通接头



订购参数	T NPT内螺纹	N		M		D 最小开口		W 扳手平面
	inch	inch	mm	inch	mm	inch	mm	inch
SS-VAC-F2	1/8	1.04	26.4	2.08	52.8	0.31	8.6	1/2
SS-VAC-F4	1/4	1.17	29.7	2.34	59.4	0.41	11.4	11/16
SS-VAC-F6	3/8	1.42	36.1	2.84	72.2	0.56	15	13/16
SS-VAC-F8	1/2	1.56	39.6	3.12	79.2	0.69	18.5	1
SS-VAC-F12	3/4	1.92	48.8	3.84	97.6	0.90	23.9	1-1/4
SS-VAC-F16	1	1.91	48.5	3.82	97.0	1.13	29.7	1-11/16

