

### 产品特点

- 紧凑型单向阀
- O型圈EPDM标配, Kalrez®可选
- 工作压力: 206bar

### 产品应用


- 专为仪表面板和系统设计

### 技术参数

工作压力:	206 bar
开启压力:	1 psi
母体材质:	详见订购参数
进/出气连接:	详见订购参数
O型圈:	EPDM标配 Viton®可选
泄漏率:	泡沫测试



### 示意图

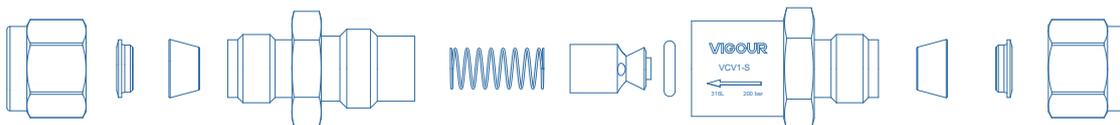

### 订购参数

**VCV1 - S - 04 - 04 - E - N2**

<p><b>材质</b></p> <p>S: 316L</p>	<p><b>进/出气连接</b></p> <p>02: 1/8" 卡套接头    3M: 3mm卡套接头    F2: 1/8" NPT(F)    M2: 1/8" NPT(M)    MV4: 1/4" Face Seal(M)</p> <p>04: 1/4" 卡套接头    6M: 6mm卡套接头    F4: 1/4" NPT(F)    M4: 1/4" NPT(M)    MV8: 1/2" Face Seal(M)</p> <p>06: 3/8" 卡套接头    8M: 8mm卡套接头    F6: 3/8" NPT(F)    M6: 3/8" NPT(M)</p> <p>08: 1/2" 卡套接头    10M: 10mm卡套接头    F8: 1/2" NPT(F)    M8: 1/2" NPT(M)</p> <p>12: 3/4" 卡套接头    12M: 12mm卡套接头    F12: 3/4" NPT(F)    M12: 3/4" NPT(M)</p> <p>16: 1" 卡套接头    20M: 20mm卡套接头    F16: 1" NPT(F)    M16: 1" NPT(M)</p>	<p><b>气体类型</b></p> <p>请标注使用气体类型</p> <p><b>O型圈</b></p> <p>E: EPDM V: Viton®</p>
---------------------------------	--	--

