

产品特点

- 适用于实验室普遍场所，用于测量压力
- 材质兼容的压缩气体压力
- 检测减压阀及系统压力
- 适用于氧气

技术参数

母体材质:	详见订购参数
类型:	径向或轴向
工作温度:	-40°C to +60°C
标称直径:	2"
连接:	1/4" NPT(M)
量程:	bar / psig
视窗:	透明PC
精度:	±2.5%
接口材质:	详见订购参数




VG系列




VR系列

产品尺寸 (mm)

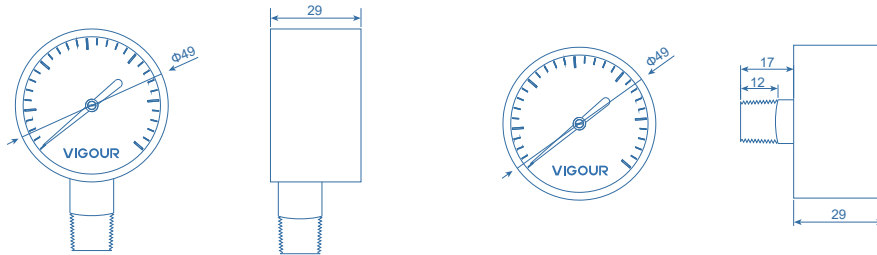

订购参数

VG 20 S - 400 - M4

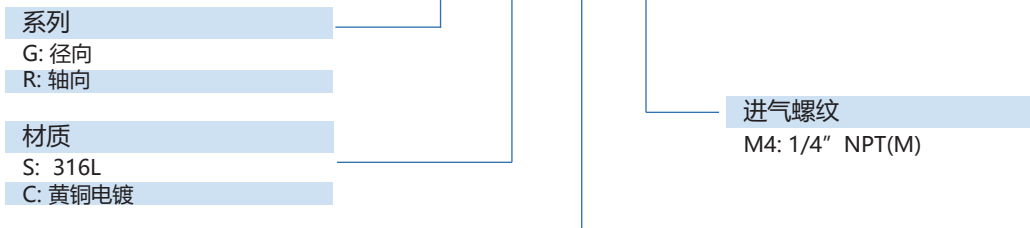

量程	
1.6B: 0~1.6bar / 0~23psig	150B: 0~150bar / 0~2000psig
2.5B: 0~2.5bar / 0~30psig	250B: 0~250bar / 0~3500psig
4B: 0~4bar / 0~60psig	315B: 0~315bar / 0~4500psig
6B: 0~6bar / 0~86psig	400B: 0~400bar / 0~5800psig
10B: 0~10bar / 0~140psig	V1.6B: -1~1.6bar / 30 in Hg VAC~23psig
16B: 0~16bar / 0~230psig	V2.5B: -1~2.5bar / 30 in Hg VAC~30psig
25B: 0~25bar / 0~350psig	V4B: -1~4bar / 30 in Hg VAC~60psig
35B: 0~35bar / 0~500psig	V6B: -1~6bar / 30 in Hg VAC~86psig
60B: 0~60bar / 0~860psig	V10B: -1~10bar / 30 in Hg VAC~140psig
100B: 0~100bar / 0~1500psig	V16B: -1~16bar / 30 in Hg VAC~230psig

