


### Product Feature

- Cylinder Connections
- Connect to a cylinder valve
- The product is fabricated in compliance with the VS001A process specification
- 1/4" NPT male / 6mm tube fitting / 6mm OD tube connection
- All connections are degrease to oxygen service
- 15µin. Ra max., 10µin. Ra average surface finish

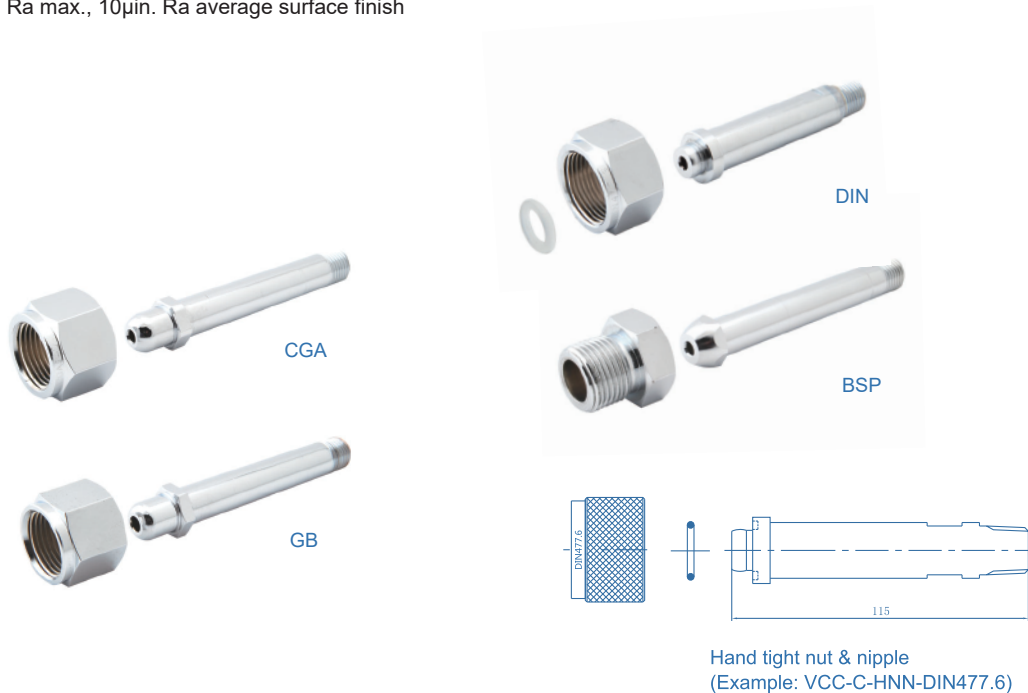

### Ordering Information

**VUC - S - N - CGA580 - TF6M**

#### Material

S: 316L

#### Parts Code

N: nut  
 NN: nut + nipple  
 HN: hand tight nut  
 HNN: hand tight nut + nipple  
 NNP: nut + nipple, plug  
 NNGP: nut + nipple, gasket, plug  
 G: gasket

#### Inlet Connection

None: 1/4" NPT(M)  
 6M: 6mm tube fitting  
 TW6M: 6mm tube weld  
 TW4: 1/4" tube weld

#### Cylinder Connection

Detailed description of the cylinder connection including the relevant standard and number of the connection

