


### Product Feature

- Quarter-turn ON/OFF, providing easy operation
- Handle shape provides visual indication of OPEN and CLOSE position
- The product is fabricated in compliance with the VS001B process specification
- Available on high and low-pressure models



### Temperature / Pressure Rating

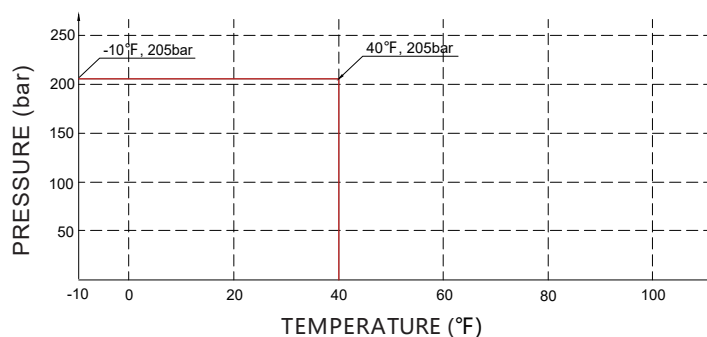


### Technical Data

Max. Working Pressure:	3000 psig (200bar)
Max. Working Temp.:	14°F ~ 104°F (-10°C ~ 40°C)
Materials	
Body:	316L secondary remelt
Diaphragm:	Elgiloy®
Seat packing:	PCTFE
Handle:	AL
Internal Leakage Allowance:	1x10 <sup>-9</sup> mbar l/s He
External Leakage Allowance:	1x10 <sup>-9</sup> mbar l/s He
Flow capacity:	Cv=0.1
Orifice:	Φ4.0mm
Weight:	approx. 0.25kg



### Dimensions (mm)

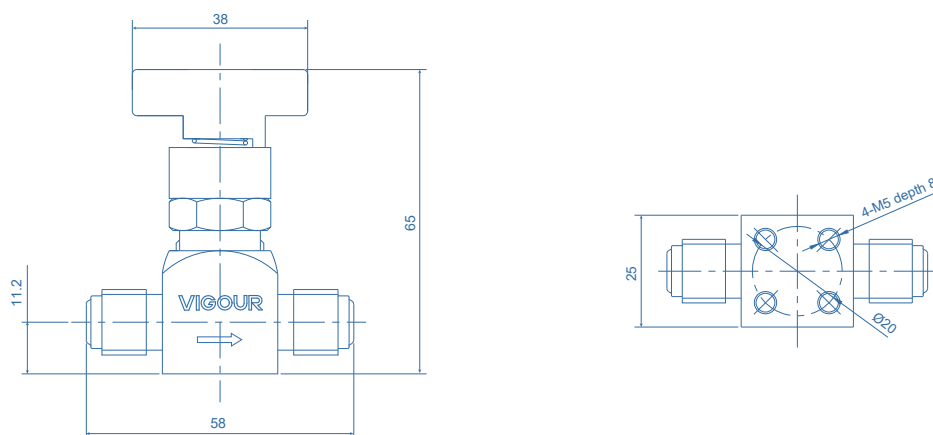

### Ordering Information

**VDV31UBS - MV4 - MV4**

#### Materials

S: 316L  
SLV: 316L secondary remelt

#### End Connection

MV4: 1/4" VFS male

\* Other connection standard, consult factory

