

Cylinder Pressure Regulator

VSR-11EH Series

VIGOUR

Product Features


- Dual stage pressure regulator
- Brass chrome plated body and bonnet for inert, reactive, flammable and oxidizing gas and mixtures up to grade 6.0
- Stainless steel 316L body and bonnet for corrosive gases
- Stable outlet pressure
- Inlet filter
- Simple outlet pressure limitation by handwheel
- Tested for use with oxygen



Typical Applications

- Component Testing
- Calibration Systems
- Laboratory Pressure Control
- High Pressure Sampling Systems
- Service & Test Equipment


Dimensions (mm)

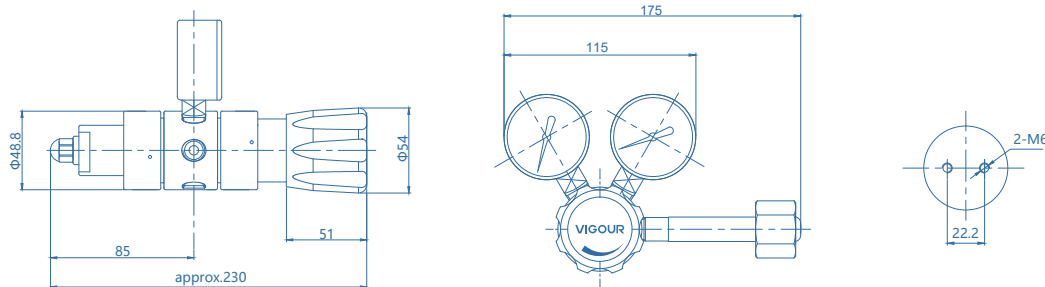


Technical Data

Type:	Dual-stage
Inlet pressure P1:	max. 300 bar
Outlet pressure P2:	50/100/200 bar
Materials	
Body regulator, Relief valve:	see ordering info
Valve seat:	PCTFE
Diaphragm:	Hastelloy® C276
Filter:	SS 316L
Inlets and Outlets:	1/4" NPT(F)
Temperature range:	-30°C to +74°C
Leak rate: (to atmosphere)	1x10 ⁻⁸ mbar l/s He
(Via seat)	1x10 ⁻⁶ mbar l/s He
Flow capacity:	Cv=0.15
Weight:	2.10kg

Flow Chart

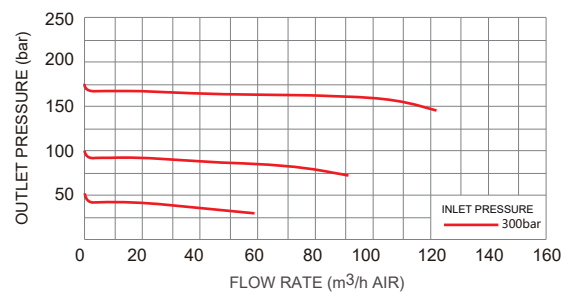

Ordering Information



Inlets / Outlets

DIN: Germany
CGA: USA
BSP: British
GB: China

UNI: Italy
NF: French
JIS: Japan
F4: 1/4" NPT(F)

M4: 1/4" NPT(M)
02: 1/8" Tube fitting
04: 1/4" Tube fitting
06: 3/8" Tube fitting

6M: 6mm Tube fitting
8M: 8mm Tube fitting
P: Gauge (Psig/bar)
B: Plug

* Other connection standard, consult factory.

Port Selection

VSR - 11EHS - 200 - 50 - 1 - 2 - 3 - 4 - 5 - B - N₂

Body Material

S: 316L
C: Chrome Plated Brass

Inlet Pressure P₁

100: 100 bar
200: 200 bar
300: 300 bar

Outlet Pressure P₂

50: 50 bar
100: 100 bar
200: 200 bar

Type of Gas

Please specify type of gas

Ordering Example

Example: VSR - 11EHC - 200 - 50 - F4 - P - P - F4 - B - B - N₂

1 - 2 - 3 - 4 - 5 - B



* For mixed gases, please specify cylinder connection standard and thread when ordering.

