

Check Valves

VCV2 Series


VIGOUR

Product Features

- Compact designed check valves
- Viton® (FKM) O-ring are standard (option: Kalrez® (FFKM))
- Pressure rating: 413 bar
- Cracking pressure: 0.06 bar

Typical Applications



- Designed for instrumentation panels and systems

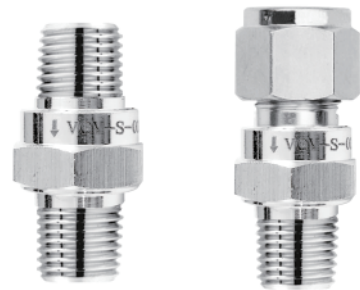

Technical Data

Working pressure:	413 bar
Cracking pressure:	1 psi
Body material:	see ordering info
Inlet / Outlet connection:	see ordering info
O-ring:	EPDM standard Viton® option
Leak rate:	Bubble-tight

Dimensions (mm)



Ordering Information

VCV2 - S - M4 - M4 - E - N2

Material

S: 316L

C: Chrome Plated Brass

Inlets

M4: 1/4"NPT(M)

04: 1/4" Tube fitting

Type of Gas

Please specify type of gas

O-raing

E: EPDM

V: Viton®

Outlets

M4: 1/4"NPT(M)

