


Product Features

- Relief valve for low pressure service
- Factory tested for proper set and resealing performance
- Tested for proof and burst



Technical Data

Set pressure:	1~50 bar
Body material:	see ordering info
Inlets / Outlets:	1/4"NPT(M) / 1/4"NPT(F)
Seal Material:	Viton®(FKM) standard Kalrez®(FFKM) option
Leak rate:	Bubble-tight
Temperature range:	-30°C to +74°C
Weight:	0.05kg

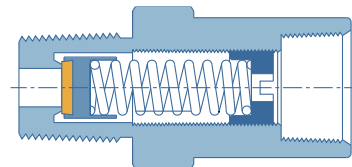

Ordering Information

VSV1 - S - 16 - N₂

Body Material

S: 316L
C: Chrome Plated Brass
B: Brass

Pressure

6: 1 to 6 bar
16: 6 to 16 bar
26: 16 to 26 bar
36: 26 to 36 bar
50: 50 to 50 bar

Type of Gas

Please specify type of gas

