


### Product Features

- Cylinder Connections
- Connect to a cylinder valve
- 1/4"NPT male / 6mm tube fitting / 6mm OD tube connection
- Maximum working pressure 200 bar standard
- All connection are supplied with sealing washer

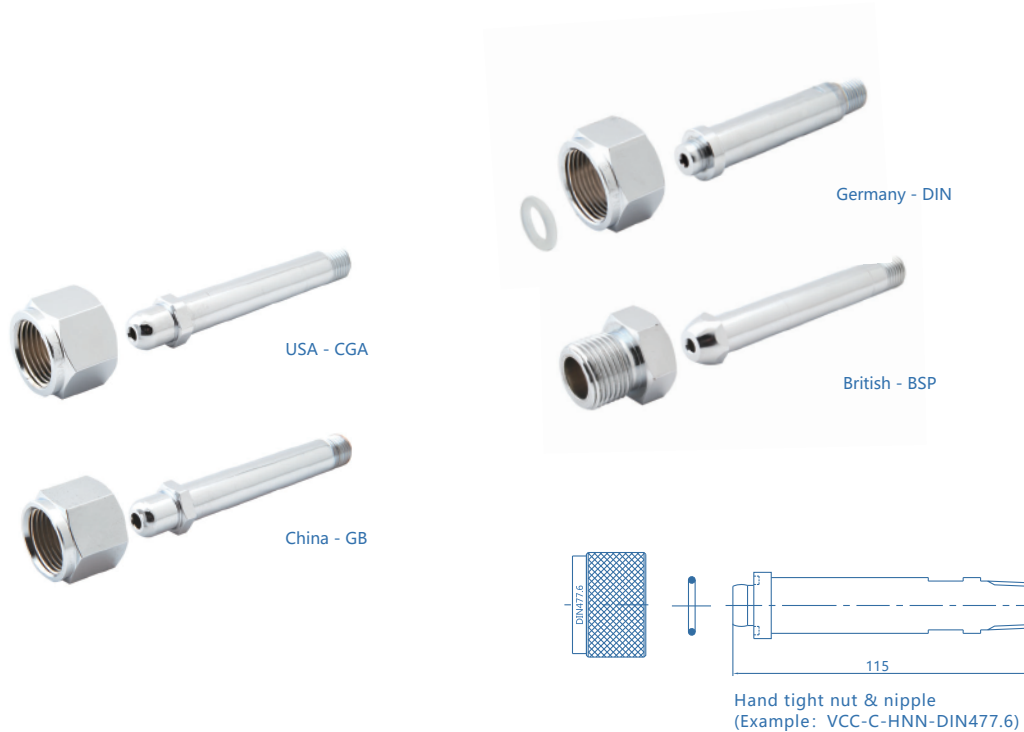

### Ordering Information

**VCC - C - N - CGA580 - 6M**

#### Material

S: 316L  
C: Chrome Plated Brass  
B: Brass

#### Parts

N: Nut  
NN: Nut / Nipple  
HN: Hand tight nut  
HNN: Hand tight nut / Nipple  
G: Gasket  
P: Plug

#### Inlet Connection

None: 1/4"NPT(M)  
6M: 6mm Tube fitting  
TW6M: 6mm Weld tube  
TW4: 1/4"Weld tube

#### Cylinder Connection

Detailed description of the cylinder connection including the relevant standard and number of the connection

