


Product Features

- Compact designed check valves
- EPDM O-ring are standard (option: Viton®)
- Pressure rating: 206 bar

Typical Applications

- Designed for instrumentation panels and systems

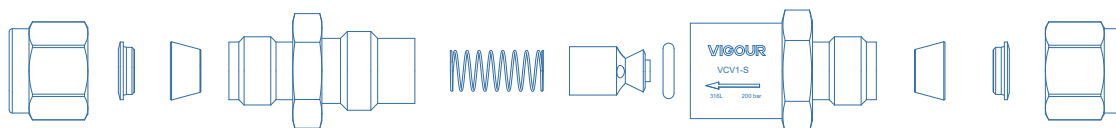

Technical Data

Working pressure:	206 bar
Cracking pressure:	1 psi
Body material:	see ordering info
Inlet / Outlet connection:	see ordering info
O-ring:	EPDM standard Viton® option
Leak rate:	Bubble-tight

Ordering Information

VCV1 - S - 04 - 04 - E - N2

Material

S: 316L

Inlets / Outlets

Type of Gas

Please specify type of gas

O-raing

E: EPDM

V: Viton®

02: 1/8" Tube fitting	3M: 3mm Tube fitting	F2: 1/8" NPT(F)	M2: 1/8" NPT(M)	MV4: 1/4" Face Seal (M)
04: 1/4" Tube fitting	6M: 6mm Tube fitting	F4: 1/4" NPT(F)	M4: 1/4" NPT(M)	MV8: 1/2" Face Seal (M)
06: 3/8" Tube fitting	8M: 8mm Tube fitting	F6: 3/8" NPT(F)	M6: 3/8" NPT(M)	
08: 1/2" Tube fitting	10M: 10mm Tube fitting	F8: 1/2" NPT(F)	M8: 1/2" NPT(M)	
12: 3/4" Tube fitting	12M: 12mm Tube fitting	F12: 3/4" NPT(F)	M12: 3/4" NPT(M)	
16: 1" Tube fitting	20M: 20mm Tube fitting	F16: 1" NPT(F)	M16: 1" NPT(M)	

