

Product Features


- High precision
- Stainless steel construction
- Repeatability, reliability, and stability
- Anti-interference
- NC or NO contacts, easy installation
- Vibration and shock resistance



Technical Data

Pressure range:	0~25 Mpa
Supply voltage:	DC 24V / 12V
Output contact:	NO / NC
Temperature:	-20°C to +80°C
Accuracy:	0.5% FS
Ingress protection:	IP65
Connection:	1/4"NPT(M)
Electrical connection:	Mini Hirschmann
Body Material:	304 / 316
Diaphragm:	Ceramic
Junction box:	Plastic

Dimensions (mm)

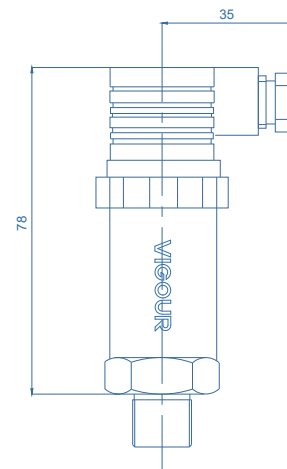

Ordering Information

VSW - S - 200

Material

S4: 304
S: 316

Pressure

60: 60 bar
100: 100 bar
200: 200 bar
250: 250 bar

