


Product Features

- Flexible connection of metal hose
- Inner tube material available 316L or PTFE
- Inlet pressure: max. 300bar (VPS Series)
- Tested for use with oxygen

Schematic Drawing

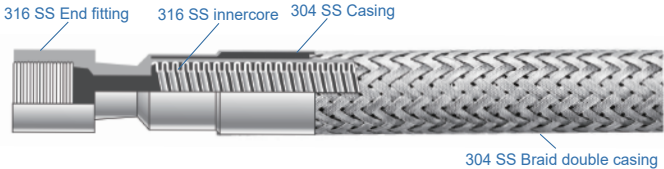

VPS Series



VPF Series



VPS Series

Ordering Information

VPF - 1/4 - 10 - F4 - F4 - D - L

Type

F: polytef
S: 316 SST

Orifice

1/4: 1/4"
1/8: 1/8"

Length

5: 500 mm
6: 600 mm
10: 914 mm
20: 2000 mm
30: 3000 mm
50: 5000 mm

Type

None: Stainless steel fence
L: Stainless steel anti-swing rope

Option

None: Single layer braided net
D: Double woven net

Outlet Connections

F4: 1/4"NPT(F)
M4: 1/4"NPT(M)
04: 1/4"Tube fitting
TB4: 1/4" TUBE
TB8: 1/2" TUBE

Inlet Connections

F4: 1/4"NPT(F)
CGA***: Cylinder connection
BSP***: BSP Cylinder connection
DIN***: DIN Cylinder connection

