


产品特点

- 气动驱动，常闭型
- 一体化设计，整合真空文丘里管、气动阀和单向阀
- 紧凑设计
- 最大真空度：-88 kPa
- 产品制造符合 VS001B 工艺规范（详见附录）





产品尺寸 (mm)

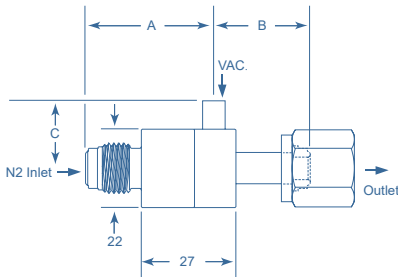

端口连接	尺寸 (mm)		
	A	B	C
MV4-FV4	36.3	-	35
FV4	-	-	35
TW4	-	-	19
FV8-MV8	-	41.5	-
TW6	-	24.4	-

真空和流量图


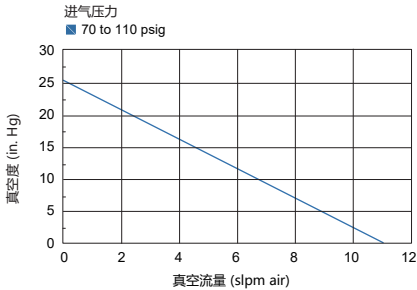
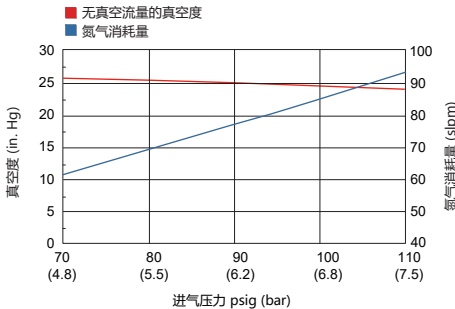


技术参数

N2 进气压力:	70 to 110 psig (4.8 to 7.6 bar)
真空接口最大压力:	3,500 psig (241 bar)
单向阀开启压力:	3 psig (0.2 bar)
适用温度:	-14~160°F (-10~71°C)
进气连接:	1/4" VFS 接头
出气连接:	1/2" VFS 接头, 3/8" 焊接接管
真空接口连接:	1/4" VFS 接头 / 焊接接管
气动阀驱动连接:	M5
气动阀驱动压力:	60 to 110 psig (4 to 7.6 bar)
泄漏率:	泡沫测试
材质	
母体:	316L
O型圈:	FKM



订购参数

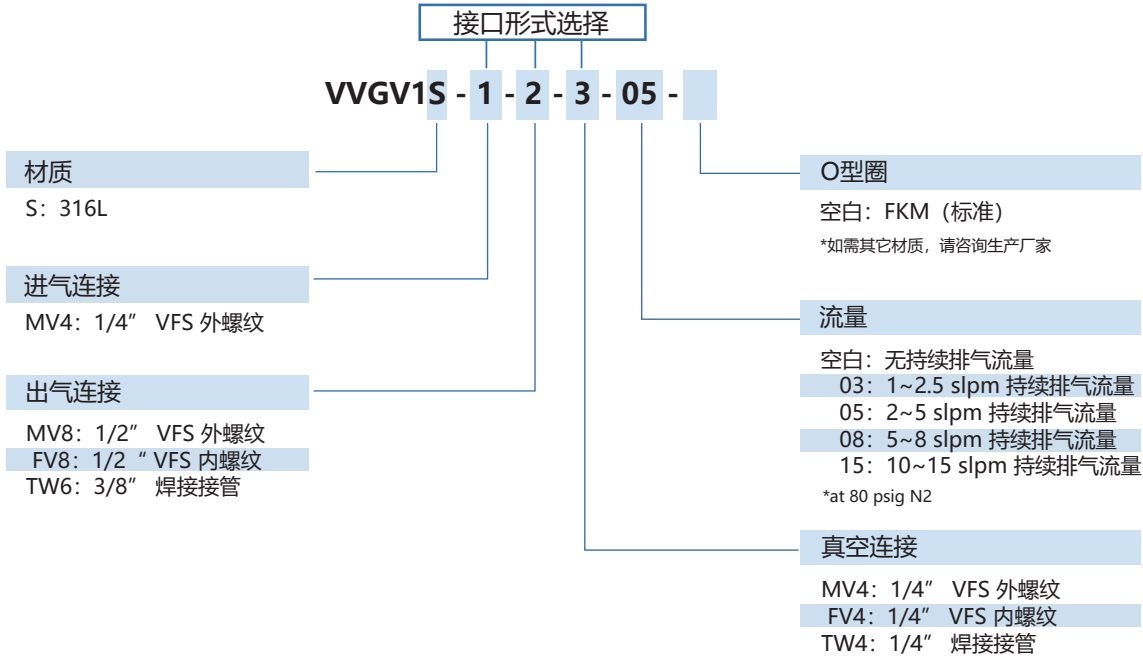

订购举例

VVG1S - MV4 - FV8 - FV4 - 05 - K

1 - 2 - 3

